



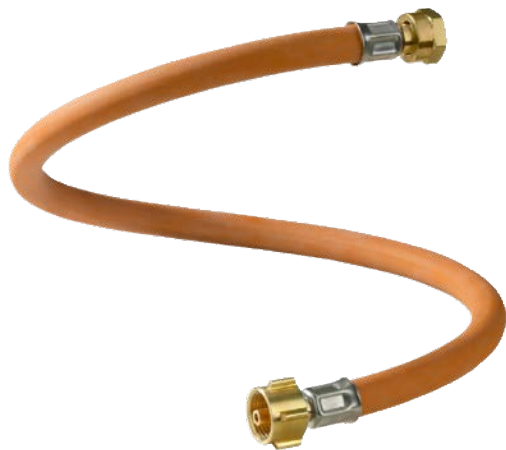

Item no. 311/143
Manufacturer's no. 7168412



High-Pressure Hose Line Caramatic ConnectBasic G.12 (KLF), 450 mm

GOK

Information

Dimensions	450 mm
Pack size	29.3 x 16.4 x 4.1 cm
Net weight	243 g
Gross weight	260 g
Catalogue page	520

The Caramatic ConnectBasic G.12 (KLF) high-pressure hose line is the ideal solution for connection to all wall-mounted low pressure regulator and switchover systems such as Caramatic BasicOne, Caramatic ProTwo or Caramatic SwitchTwo with M20 x 1.5 inlet. It ensures a safe and reliable connection.

Country-specific connection

Thanks to its country-specific connection, the Caramatic ConnectBasic G.12 (KLF) is perfectly suited for use in **Germany**, **Austria** and **Poland**.

Robust and cold-resistant construction

The hose is made of rubber with a textile insert and is extremely robust and cold-resistant down to -30 °C. This ensures high performance and durability, even under extreme conditions.

Technical specifications:

- Dimensions: 6.3 x 3.5 mm
- Cylinder connection x regulator connection

Safety note

The hose line with a length of 750 mm is only suitable for

Specifications

Connection	G.12 (KLF) x M20 x 1.5 ÜM
Colour	orange
Max. pressure: PS	30 bar
Type	G.12 (KLF)

use with cylinder holders that have a pull-out mechanism. This ensures that the hose line is not subjected to excessive stress and can always be operated safely.

The Caramatic ConnectBasic G.12 (KLF) high-pressure hose line offers maximum flexibility and safety for your gas installations. Thanks to its robust design and cold resistance, it is the ideal choice for a wide range of applications. Trust in quality and reliability – choose the Caramatic ConnectBasic G.12 (KLF) high-pressure hose line.